



Republic of the Philippines
SOUTHERN LEYTE STATE UNIVERSITY
 Main Campus, Sogod, Southern Leyte
 website: www.slsuonline.edu.ph
 email: slsumaincampus@gmail.com/
op@slsuonline.edu.ph telefax: (053) 577-8299



Bids & Awards Committee

BID BULLETIN No. 03

**RE: BIDDING FOR THE COMPLETION OF
 3-STOREY AGRI-FISHERY BUILDING AT BONTOC CAMPUS**

Subject: REVISED BILL OF QUANTITIES


This Addendum No. 03 is issued to modify or amend the Bill of Quantities (BOQ) of the above-mentioned project due to technical reasons particularly, **Item # G. TRANSFORMER SYSTEM**. This shall form an integral part of the Bid Documents.



Item No.	Description/Materials	Qty.	Unit
G	Installation of 3 – 50 KVA Transformer Banking with accessories and Professional Fee for the Signing and Sealing of the Professional Engineer (PEE).		
	50 KVA Transformer	3	units
	Anchor, Expanding, 10,000 Pounds, 8 Way, Galvanized Steel	8	pcs.
	Attachment, Guy, malleable Type with 11/16" Hole Diameter	8	pcs.
	Bolt, Carriage 3/8" x 4-1/2"	22	pcs.
	Bolt, Double Arming, 5/8" x 22"	27	pcs.
	Bolt, Machine, 1/2" x 10"	6	pcs.
	Bolt, Machine, 1/2" x 12"	12	pcs.
	Bolt, Machine, 1/2" x 6"	12	pcs.
	Bolt, Machine, 5/8" x 10	2	pcs.
	Bolt, Machine, 5/8" x 14"	1	pc.
	Bolt, Machine, 5/8" x 6"	3	pcs.
	Bolt, Machine, 5/8" x 8"	8	pcs.
	Bolt, Oral Eye, 5/8 x 12"	5	pcs.
	Bolt, Single Upset, 5/8" x 10"	1	pc.
	Brace, Crossarm, 28", Steel Flat	22	pcs.
	Brace, Sidearm, Diagonal, 7 Feet	6	pcs.
	Brace, Sidearm, Vertical, 50"	6	pcs.
	Bracket, Transformer	2	pcs.
	Clamp, Anchor Rod Bonding, Single Eye	8	pcs.
	Clamp, Deadend Strain, #2/0 ACSR	15	pcs.
	Clamp, Guy Straight, 3 Bolt, Heavy Duty Steel	16	pcs.
	Clamp, Hot Line, #2 - #4/0 ACSR	3	pcs.
	Clamp, Loop Deadend, #6 to # 2/0 ACSR	10	pcs.

Clevis, Secondary Swinging without Spool	5	pcs.
Conductor, bare, ACSR # 1/0, AWG 6/1	2,300	mts.
Connector, Compression, WR-399, # 1/0 - # 2/0 ACSR Run to # 3/0 - # 4/0	31	pcs.
Connector, Ground Rod (Clamp) for 5/8" Steel Rod	3	pcs.
Cutout and Arrester Combination	3	sets
Insulator, Pin Type, Polymer, ANSI, Class 55 - 5	28	pcs.
Insulator, Spool, 1-3/4", ANSI, Class 53-2	6	pcs.
Insulator, Suspension, 6", Porcelain, Clevis Type	30	pcs.
Nut, Eye, 5/8, Conventional	15	pcs.
Nut, Lock, Mf Type, 1/2"	24	pcs.
Nut, Lock, Mf Type, 3/8"	22	pcs.
Nut, Lock, Mf Type, 5/8"	110	pcs.
Pin, Crossarm, Steel, Long Shank	26	pcs.
Pin, Pole Top, Channel, 1" Thread, 25" Long	1	pc.
Rod, Anchor, Threaded, Single Eye, 5/8" x 7'	8	pcs.
Rod, Ground Steel, Galvanized, 5/8" x 10'	3	pcs.
Washer, Round, 1-3/8" Diameter with 9/16" Diameter Hole	24	pcs.
Washer, Square Flat, 2-1/4" x 2-1/4" x 3/16", 13/16" Diameter Hole	104	pcs.
Wire, Guy Steel, 3/8", 7 Strand	400	ft
STEEL MATERIAL		
Crossarm, Steel, 3" x 4" x 8"	23	pcs.
Pole, Steel, 40" (3.0mm)	6	pcs.
LINE CONSTRUCTION		
Material Cost		
Labor		
Overhead		
METERING		
Kilowatthour-Meter Testing Fee	1	pc.
Kilowatthour-Meter Program	1	pc.
Kilowatthour-Meter Seal	6	pcs.
Power Cable, 4 core, AWG No. 10	10	mts.
PVC, orange, 1"Ø	10	pcs.
PVC Short Elbow, orange, 1"Ø	10	pcs.
PVC Adoptor, orange, (male) 1"Ø	20	pcs.
PVC Adoptor, orange, (female) 1"Ø	20	pcs.
PVC Solvent	1	can
Rubber Tape	2	rolls
Meter Box	1	unit
Current Transformer Box	1	unit


For further inquiries, you may coordinate with the Bids & Awards Committee Secretariat at the following contact numbers: 0956-549-0615 (Globe) & 0955-871-7988 (TM).

Please be guided accordingly.


VALERIO B. CABALO, Ph.D.
Chairperson
Date: **Dec. 19, 2019**

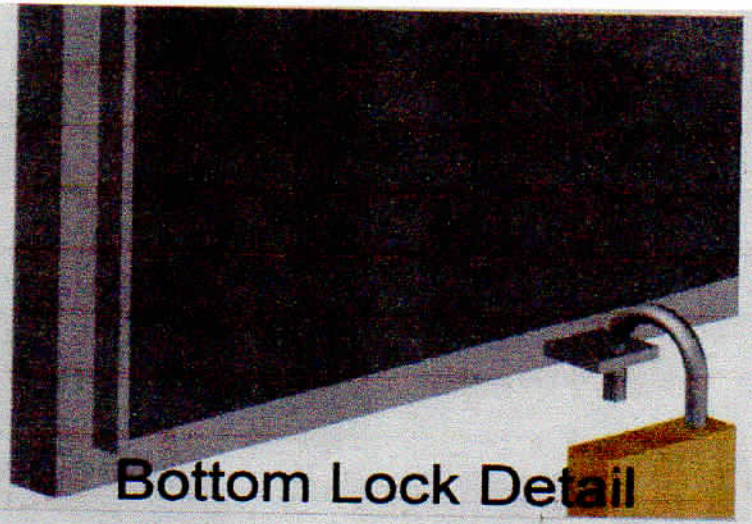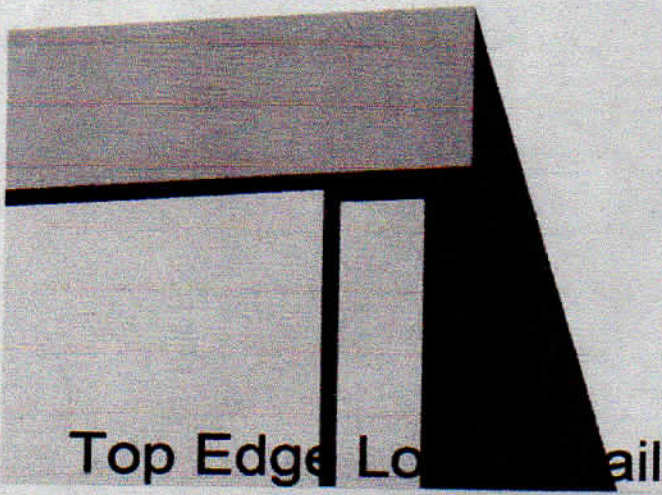

Note:
Use Steel Plate w/ Gauge #16
3/4" Plywood Thickness

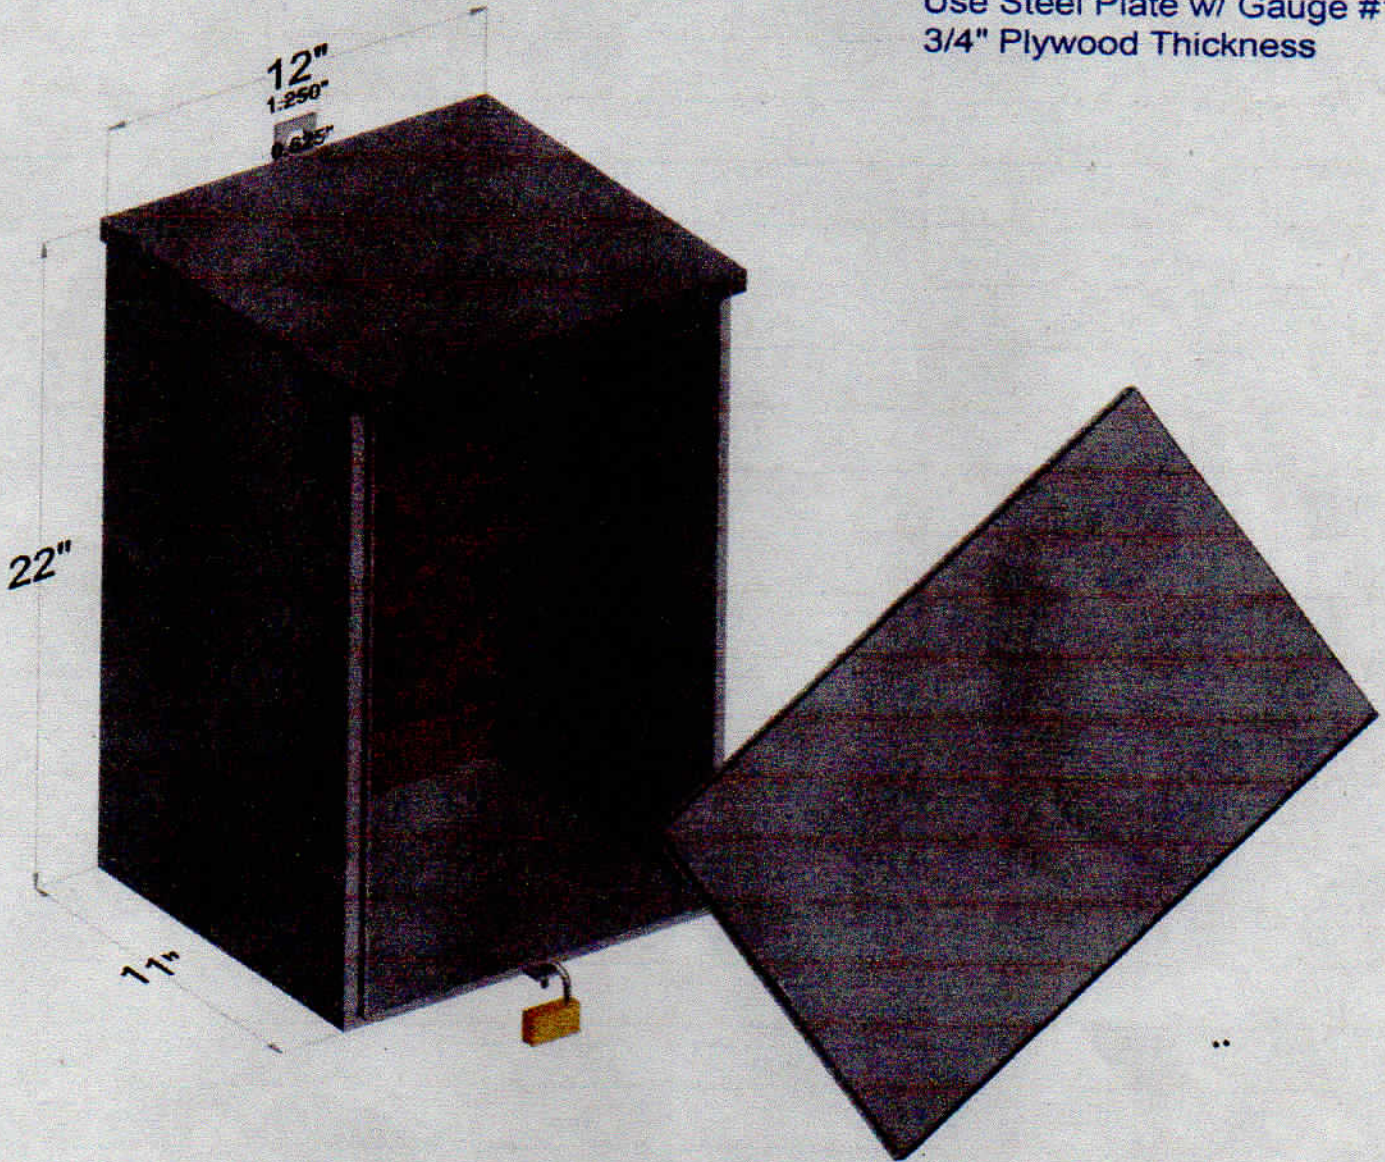

CT BOX (3 Phase)